



Illuminate with precision, offer diverse options, and unleash creativity with the brilliance of the liniLED® Top R Power Colour LED strip. Immerse your spaces in a vibrant spectrum of colours with the Red, Green, and Blue options.

Seamless installation is made effortless with the IP67 flexible silicon extrusion, ensuring adaptability and reliability in various environments. Whether you're highlighting architectural features, creating decorative accents, or designing captivating lighting effects, the liniLED® Top R Power Colour offers versatile solutions to meet diverse project requirements.

With a high Color Rendering Index (CRI) of 90, this product guarantees accurate colour representation, enhancing the visual appeal of any illuminated space. Choose confidence in quality and creativity with the liniLED® Top R Power Colour, providing an ideal combination of performance and aesthetics.

For the latest version of this datasheet, visit our website: <https://www.triolight.com/en/led-products/led-strips>

USPs

- IP67 flexible silicon extrusion for easy mounting
- Easy mounting due to self-adhesive tape at the back
- Flexible and cuttable every 100 mm cutting section
- 5 year warranty

Available colours

Colour	Description
● Red	liniLED® Top R Red Power 130
● Green	liniLED® Top R Green Power 180
● Blue	liniLED® Top R Blue Power 60




Technical specifications

	Red	Green	Blue
Product code	RT014-R	RT020-G	RT007-B
Power (24V DC)	4.32 W/m	2.00 W/m	3.00 W/m
Color	Red	Green	Blue
CRI	/	/	/
Luminous flux	136 lm/m	193 lm/m	65 lm/m
Luminous efficiency	31.5 lm/W	96.4 lm/W	21.7 lm/W
Spool length	5 m		
Section length	100 mm		
LED type	2835		
Number of LEDs	60 pcs		
Max. connection length	5 m		
Min. operating voltage	23V DC		
Max. operating voltage	25V DC		
Width	12 mm		
Height	5 mm		
Dimmable	PWM, 0-10V, DALI and DMX dimming		
MacAdam Steps	3 Steps		
Type of protection	IP67		
Storage temperature	-20°C ... +60°C		
Operating temperature	-20°C ... +70°C		

Typical measured values are given, which due to tolerances in components and production process can vary up to 10%.

Product drawings

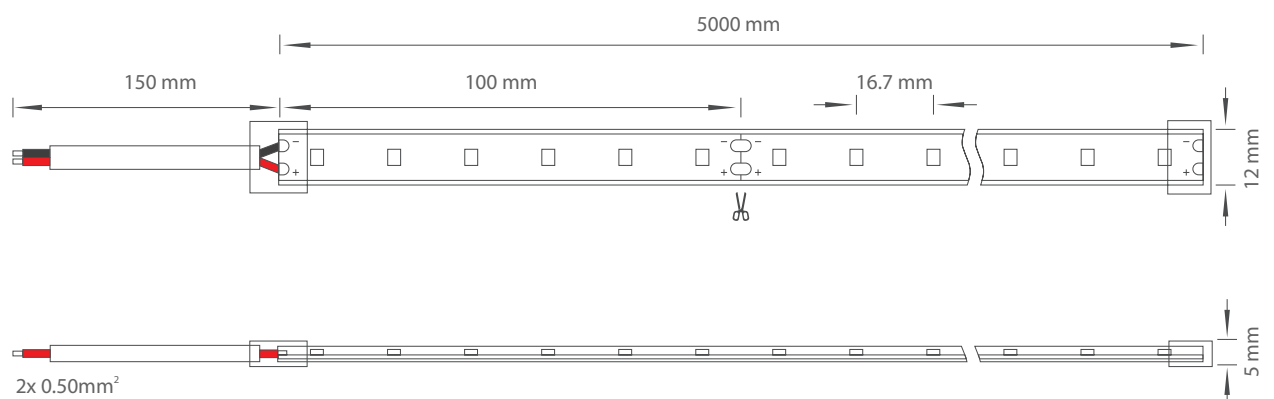

Power consumption

To power the liniLED® LED strips and lighting fixtures, a power supply from the liniLED® Power assortment can be selected. Selection of the correct power supply must be done by taking the total requested power and the environment into account.

The total power consumption can be calculated by summing the requested power of all connected products. To calculate the power consumption of a single length of LED strip, use the equation below. The typical equation is valid if the product is supplied by a 24 V DC constant voltage power supply. If the output voltage of a power supply is increased, the power consumption will increase with the same ratio and needs to be corrected by using the optional part of the equation found between brackets.


$$P_{STRIP} = P_{PRODUCT} \times X_{LENGTH} \times 110\% \left[\times \frac{U_{SUPPLY}}{24} \right]$$

- P_{STRIP}** Calculated power consumption of one LED strip in Watt
- $P_{PRODUCT}$** Typical power consumption in Watt per metre of the selected LED strip
This value can be found under 'Product characteristics' on page 2
- X_{LENGTH}** Length of the connected LED strip in metres
- 110%** Safety margin to buffer differences over all production batches
- Optional:
- U_{SUPPLY}** Set supply voltage of the power supply in Volt
- 24** Nominal supply voltage of liniLED® in Volt

Photometric information

In the process of lighting design and calculations, the luminous flux and beam angle alone are not enough information to create a representative and realistic calculation or render. There is a set of photometric files for each LED strip type, available in two different file formats:

- Eulumdat (.ldt)
- IES LM-63-1995 (.ies)

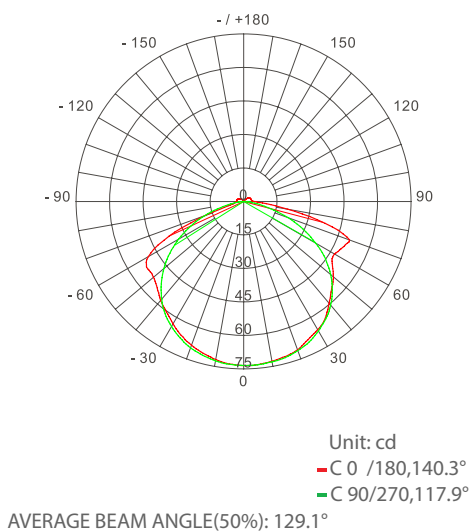


Flux Out: 190.5lm

0.3m	190.5,847.2lx	109.92cm
0.6m	47.62,211.8lx	219.85cm
0.9m	21.17,94.14lx	329.77cm
1.2m	11.91,52.95lx	439.70cm
1.5m	7.620,33.89lx	549.62cm
1.8m	5.292,23.53lx	659.55cm
2.1m	3.888,17.29lx	769.47cm
2.4m	2.977,13.24lx	879.40cm
2.7m	2.352,10.46lx	989.32cm
3.0m	1.905,8.472lx	1099.25cm

Height Eavg, Emax Beam Angle: 122.75° Diameter

Note: the above data is based on RT020-G. For other data, please consult sales rep.


Power and connection diagram

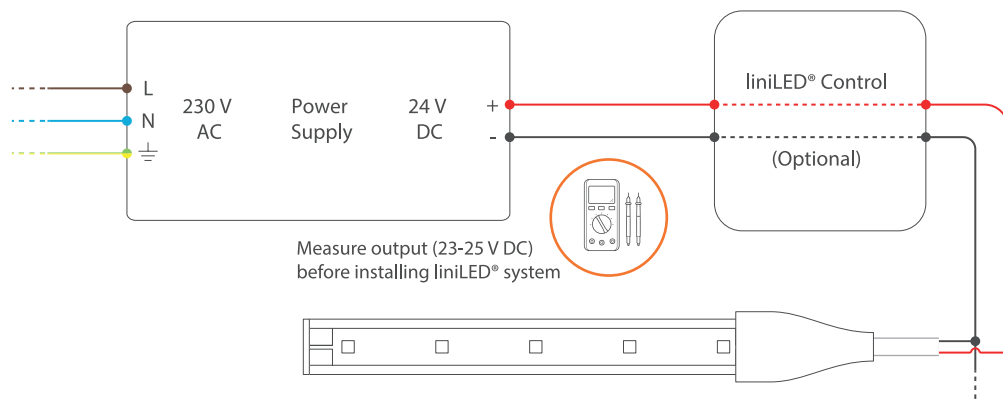

Accessories


RT12-Con

liniLED® Top R Connector Cap 12 mm




RT12-Cap

liniLED® Top R End Cap 12 mm




RT-C-M

liniLED® Top R Cable Mono 300mm




R-Glue

liniLED® Silicone glue



RT12-Clip

liniLED® Top R Mounting Clip 12mm



Disclaimer

The published information is checked to be as accurate as possible, however Triolight B.V. or any reseller of liniLED® cannot be held liable for any damages resulting from misprints, errors, modifications or outdated information. No legal rights can be derived from this document. Triolight B.V. reserves the right to modify the information without informing the customers. Please check for the latest version on www.triolight.com. This product should not be used in applications, devices or systems where incorrect operation of the product may result in personal injury (includes emergency lighting) without written permission from the board of Triolight B.V. If nevertheless used in such applications, devices or systems, Triolight B.V. cannot be held liable for any resulting injury. liniLED® is a registered trademark of Triolight B.V.

Symbols



Manufacturer's declaration that the product meets the applicable EC directives.



Operating voltage of 24 V DC.



Electro Static Discharge (ESD) sensitive device, apply standard ESD precautions when handling the product.



Restriction of Hazardous Substances (RoHS): product complies with the RoHS directive and each homogeneous material does not exceed the limits for the materials mentioned under the RoHS directive (Pb, Hg, Cd, Cr6+, PBB and PBDE).



Not protected against ingress of solid foreign objects. Not-protected against ingress of water.



White colour consistency up to 2 SDCM ellipse over an entire single strip length. LEDs used are single BIN 3 SDCM ellipse, but their careful combination in a LED strip during the production process, results in a mixed light through a diffusive material which is within a 2 SDCM ellipse (probability >90%). Due to variability this is not legally binding. The guaranteed colour consistency can be found in the technical specifications.



System guarantee of 5 years when the complete system consists of liniLED® products with the 5 years system warranty logo. Terms & conditions apply.



This product is resistant to solvents be applied its environment. These elements will have no harmful effect on the product.



This product can be stored and used below 0 degrees Celsius. Verify the minimum storage and operating temperature in the datasheet or manual for the lowest temperature allowed.



This product can be applied in seawater and its environment. Elements in seawater will have no harmful effect on the product. For chemical specifications of these elements see the liniLED® material sheet. Verify the IP rating for proper use.



This product can be applied inside swimming pool environments. Elements in the air will have no harmful effect on the product. For chemical specifications of these elements see the liniLED® material sheet. Verify IP rating for proper use.