



Index

TECHNICAL SPECIFICATIONS	2
PRODUCT DRAWINGS	2
PHOTOMETRIC INFORMATION	3
POWER CONSUMPTION	3
BENDING RADIUS	4
POWER AND CONNECTION DIAGRAM	4
MAXIMUM CABLE LENGTH	5
SYMBOLS	6

PCB 2200K-3500K TWW 1200

The liniLED® PCB 2200K-3500K TWW 1200 LED strip (IP00) is a high quality, flexible LED strip, which can be adjusted to a colour temperature range between 2200K-3500K. The LED strip is equipped with 3M self-adhesive tape. Thanks to its small dimensions the PCB LED strip is ideal for usage in small (indoor) spaces.

In order to power liniLED® products safely, it is absolutely necessary to operate them with an electronically stabilized power supply protected against short circuits, overload and overheating.

To ease the luminaire/installation approval, electronic control gear for liniLED® products should carry the CE mark. Preferably a controller from the liniLED® Control Range is used. In Europe, the declarations of conformity must include the following standards: CE: EN 55015, IEC 61547 and IEC 61000-3-2.

For the latest version of this datasheet, visit our website: www.liniLED.com

USPs

- Tunable white 2200K – 3500K for dynamic white applications
- Single bin for both white colours
- No pinkish effect during colour mixing
- Extra-long lifetime – 60,000 h (L80/B10)
- Dimmable with PWM technology
- Single piece reel-to-reel technology
- Very flexible & cuttable (bend radius > 20 mm)
- Excellent lumen/Watt ratio
- Available in long lengths
- Ideal for small indoor spaces
- Made in Europe
- ESD and reverse voltage protection
- Part of plug & play solution

Available colours

Colour	Description
 White 2200K - 3500K	liniLED® PCB 2200K-3500K TWW 1200



Technical specifications

2200 - 3500K

TWW 1200

Product code [m]	12467
Power (24V DC)	11.3 W/m
Power (25V DC)	11.8 W/m
CCT ¹³	2200 - 3500K
CRI	>80
Luminous flux ¹	1200 lm/m
Luminous efficiency ¹	106 lm/W
Spool length	Max. 9 m
Section length	75 mm
LED type	3014
Number of LEDs	12 per section/160 per metre
Max. connection length ⁴	9 m
Min. operating voltage	23V DC
Max. operating voltage	25V DC
Beam angle	120°
Dimensions	8 x 1.45 mm
Dimmable	PWM dimming, 24V DC Common Anode
MacAdam Steps	3 MacAdam ellipse per single channel, resulting in combined values of up to 3.8
Weight	9 gram per metre
Expected lifetime	L80/B10 > 60,000 hrs @ Tc = 40°C
Ingress protection	IP00
Storage temperature	-40°C ... 85°C
Operating temperature ²	-30°C ... 85°C
Minimum bending radius	20 mm
CCT Warm White	2200 K
Power 2700 K	6.1 W/m
Flux 2700 K	600 lm/m
CCT Cold White	3500 K
Power 6500 K	5.2 W/m
Flux 6500 K	600 lm/m


¹ Typical measured values are given, which due to tolerances in components and production process can vary up to 10%.

² Max. connection length between -30°C and -20°C is 6.3 m.

³ Both channels @ 100% = 2700K.

⁴ UL certification allows an operable length of max 8.4 m.

Product drawings

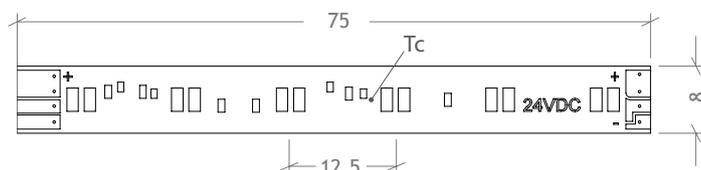


Photometric information

In the process of lighting design and calculations, the luminous flux and beam angle alone are not enough information to create a representative and realistic calculation or render. There is one set of photometric files for a one metre length of LED strip and one for a segment length, that corresponds to the cutting length of each LED strip type. Using the one metre data, quick calculations and long lengths can be simulated with photometric software. The segment data allows very detailed simulations, even curved lines can be approached in high detail.

The information on the website is available in two different file formats:

- Eulumdat (*.ldt)
- IES LM-63-1995 (*.ies)

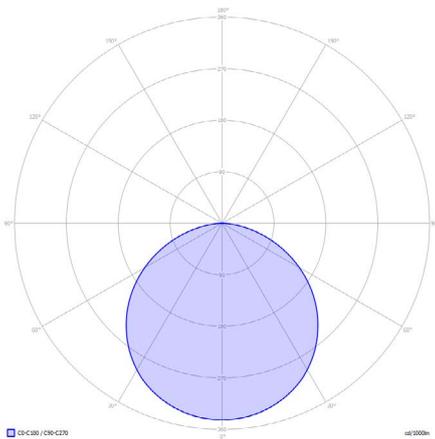

Power consumption

To power the liniLED® LED strips and lighting fixtures, a power supply from the liniLED® Power assortment can be selected. Selection of the correct power supply must be done by taking the total requested power and the environment into account.

The total power consumption can be calculated by summing the requested power of all connected products. To calculate the power consumption of a single length of LED strip, use the equation below. The typical equation is valid if the product is supplied by a 24 V DC constant voltage power supply. If the output voltage of a power supply is increased, the power consumption will increase with the same ratio and needs to be corrected by using the optional part of the equation found between brackets.

$$P_{STRIP} = P_{PRODUCT} \times X_{LENGTH} \times 110\% \left[\times \frac{U_{SUPPLY}}{24} \right]$$




- P_{STRIP}** Calculated power consumption of one LED strip in Watt
- $P_{PRODUCT}$** Typical power consumption in Watt per metre of the selected LED strip
This value can be found under 'Product characteristics' on page 2
- X_{LENGTH}** Length of the connected LED strip in metres
- 110% Safety margin to buffer differences over all production batches

Optional:


- U_{SUPPLY}** Set supply voltage of the power supply in Volt
- 24** Nominal supply voltage of liniLED® in Volt

Bending radius

Maximum bending radius is 20 mm. Solely bend up or downward. Do not compress, stretch or bend the LED strip sideways.

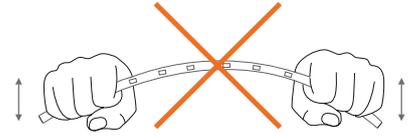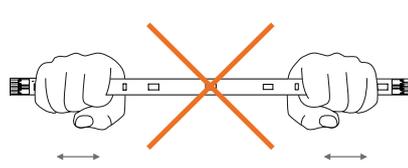

Power and connection diagram

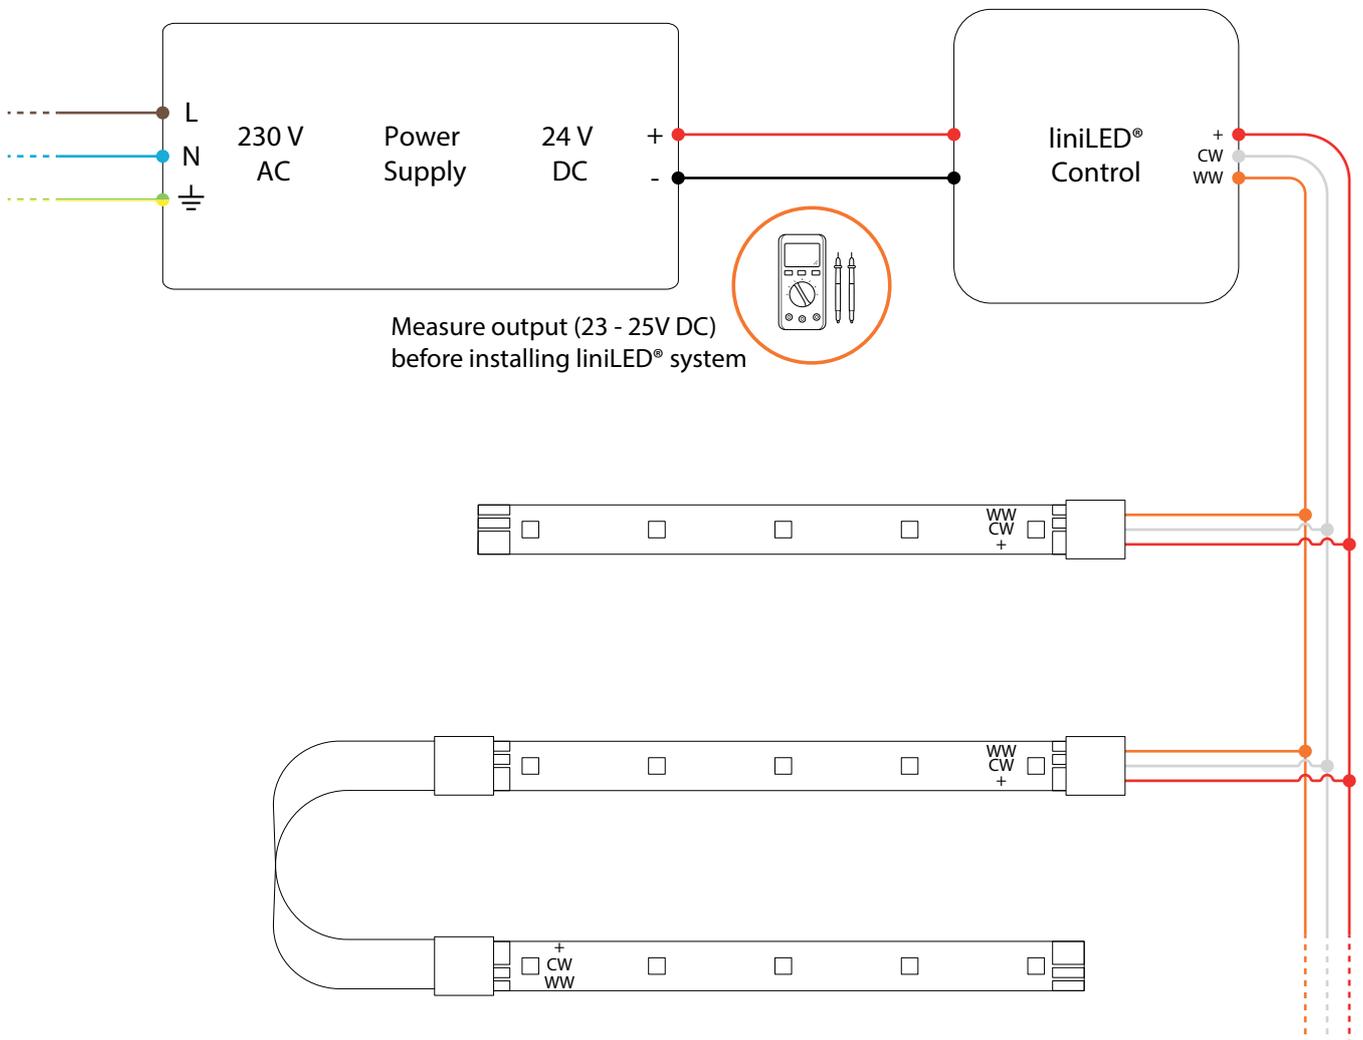

Maximum cable length


1 = Select colour temperature.

2 = Select LED strip length.

3 = Select output voltage.

4 = Select cable cross section.

Result = Maximum cable length based on the cable thickness and power supply voltage.

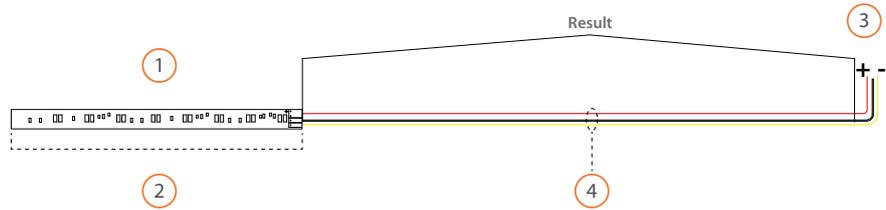

1. Colour temperature

2200K-3500K TWW 1200

2. LED strip length		1 m		2 m		5 m		9 m	
3. Voltage		24 VDC	25 VDC	24 VDC	25 VDC	24 VDC	25 VDC	24 VDC	25 VDC
4. Cable cross section	0.50 mm ² - 0.035 Ω/m	34.4 m	67.2 m	16.6 m	33.0 m	5.9 m	12.4 m	2.7 m	6.3 m
	0.75 mm ² - 0.023 Ω/m	51.7 m	101.0 m	24.9 m	49.5 m	8.8 m	18.6 m	4.0 m	9.5 m
	1.00 mm ² - 0.018 Ω/m	68.7 m	134.2 m	33.1 m	65.8 m	11.7 m	24.8 m	5.4 m	12.6 m
	1.50 mm ² - 0.012 Ω/m	103.3 m	201.9 m	49.7 m	99.0 m	17.6 m	37.3 m	8.1 m	19.0 m
	2.50 mm ² - 0.007 Ω/m	171.9 m	336.0 m	82.8 m	164.8 m	29.3 m	62.1 m	13.4 m	31.6 m

⚠ **Note:** Calculations are based on a standard connector with 1 metre cable (0.5 mm²).

Symbols



Electro Static Discharge (ESD) sensitive device, apply standard ESD precautions when handling the product.



Manufacturer's declaration that the product meets the applicable EC directives.



Restriction of Hazardous Substances (RoHS): product complies with the RoHS directive and each homogeneous material does not exceed the limits for the materials mentioned under the RoHS directive (Pb, Hg, Cd, Cr6+, PBB and PBDE).



Not protected against ingress of solid foreign objects. Not-protected against ingress of water.



Bending of the LED strip is possible with a radius of ≥ 20 millimetres in the specified direction.



Electrical appliance class III: this product is designed to be supplied from an extra-low voltage (≤ 60.0 V DC or ≤ 42.4 V AC).



System guarantee of 5 years when the complete system consist of liniLED® products with the 5 years system warranty logo. Terms & conditions apply.



Operating voltage of 24 V DC.



The binning tolerance of this product is 3 MacAdam.

Disclaimer

The published information is checked to be as accurate as possible, however Triolight B.V. or any reseller of liniLED® cannot be held liable for any damages resulting from misprints, errors, modifications or outdated information. No legal rights can be derived from this document. Triolight B.V. reserves the right to modify the information without informing the customers. Please check for the latest version on www.liniLED.com. This product should not be used in applications, devices or systems where incorrect operation of the product may result in personal injury (includes emergency lighting) without written permission from the board of Triolight B.V. If nevertheless used in such applications, devices or systems, Triolight B.V. cannot be held liable for any resulting injury. liniLED® is a registered trademark of Triolight B.V.