





#### Features:

- Universal AC input / Full range (up to 305VAC)
- · Built-in active PFC function
- High efficiency up to 93.5%
- Protections: Short circuit / Over current / Over voltage / Over temperature
- · Cooling by free air convection
- · OCP point adjustable through output cable or internal potentiometer
- IP67 / IP65 design for indoor or outdoor installations
- Three in one dimming function (1~10Vdc or PWM signal or resistance)
- · Suitable for LED lighting and street lighting applications
- · Compliance to worldwide safety regulations for lighting
- · Suitable for dry / damp / wet locations
- 5 years warranty (Note.9)



















HLG-120H-12 A

Blank: IP67 rated. Cable for I/O connection.

A: IP65 rated. Output voltage and constant current level can be adjusted through internal potentiometer.

B: IP67 rated. Constant current level adjustable through output cable with 1~10Vdc or 10V PWM signal or resistance.


D (option): IP67 rated. Timer dimming function, contact MEAN WELL for details.

#### **SPECIFICATION**


MODEL		HLG-120H-12	HLG-120H-15	HLG-120H-20	HLG-120H-24	HLG-120H-30	HLG-120H-36	HLG-120H-42	HLG-120H-48	HLG-120H-54			
	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V			
	RATED CURRENT	10A	8A	6A	5A	4A	3.4A	2.9A	2.5A	2.3A			
	RATED POWER	120W	120W	120W	120W	120W	122.4W	121.8W	120W	124.2W			
	RIPPLE & NOISE (max.) Note.2	150mVp-p	150mVp-p	150mVp-p	150mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p			
	VOLTAGE ADJ. RANGE Note.5	10.8 ~ 13.5V	13.5 ~ 17V	17 ~ 22V	22 ~ 27V	27 ~ 33V	33 ~ 40V	38 ~ 46V	43 ~ 53V	49 ~ 58V			
OUTDUT	CURRENT AR L RANGE	Can be adjusted by internal potentiometer or through output cable											
OUTPUT	CURRENT ADJ. RANGE	5 ~ 10A	4 ~ 8A	3 ~ 6A	2.5 ~ 5A	2 ~ 4A	1.7 ~ 3.4A	1.4 ~ 2.9A	1.2 ~ 2.5A	1.1 ~ 2.3A			
	VOLTAGE TOLERANCE Note.3	±2.5%	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%			
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%			
	LOAD REGULATION	±2.0%	±1.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%			
	SETUP, RISE TIME Note.7	2500ms, 50m	s at full load	230VAC / 115\	/AC ; B type 2	2500ms, 200ms	s at 95% load	230VAC / 115	VAC	•			
	HOLD UP TIME (Typ.)	12ms at full lo	ad 230VAC										
	VOLTAGE RANGE Note.4	90 ~ 305VAC 127 ~ 431VDC											
	FREQUENCY RANGE	47 ~ 63Hz											
	POWER FACTOR (Typ.)	PF>0.98/115\	/AC, PF>0.95/2	230VAC, PF>0	.93/277VAC at	full load (Pleas	se refer to "Pow	er Factor Char	acteristic" cur	ve)			
INPUT	EFFICIENCY (Typ.)	92%	92%	93%	93%	93%	93%	93%	93.5%	93.5%			
	AC CURRENT (Typ.)	1.4A / 115VA	0.6A/2	30VAC 0.	.55A / 277VAC								
	INRUSH CURRENT (Typ.)	COLD START 75A/230VAC											
	LEAKAGE CURRENT	<0.75mA / 277VAC											
		95 ~ 108%											
	OVER CURRENT	Protection type: Constant current limiting, recovers automatically after fault condition is removed											
	SHORT CIRCUIT	,,				It condition is r							
PROTECTION	OVER VOLTAGE	14 ~ 17V	18 ~ 21V	23 ~ 27V	28 ~ 34V	34 ~ 38V	41 ~ 46V	47 ~ 53V	54 ~ 60V	59 ~ 65V			
		Protection type: Shut down o/p voltage with auto-recovery or re-power on to recovery											
	OVER TEMPERATURE	85°C ±10°C (RTH2)											
		Protection type : Shut down o/p voltage, recovers automatically after temperature goes down											
	WORKING TEMP.	-40 ~ +70°C (Refer to "Derating Curve")											
	WORKING HUMIDITY	20 ~ 95% RH non-condensing											
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH											
	TEMP. COEFFICIENT	±0.03%/°C (0											
	VIBRATION			le, period for 7	72min, each ald	ong X, Y, Z axe	s						
								ed · Design refer	to I II 60950-1	TUV FN60950-1			
	WITHSTAND VOLTAGE	UL8750, EN61347-1, EN61347-2-13 independent, J61347-1, J61347-2-13, IP65 or IP67 approved; Design refer to UL60950-1, TUV EN60950-1  I/P-O/P:3.75KVAC I/P-FG:1.88KVAC O/P-FG:0.5KVAC											
SAFETY &	ISOLATION RESISTANCE				0VDC / 25°C /								
EMC	EMC EMISSION					N61000-3-2 C	lass C (≥50%	load) : FN610	00-3-3				
	EMC IMMUNITY			,	•	5024, heavy in		•					
	MTBF	192.2Khrs mi		K-217F (25°C)		, <b>.</b>	, (	,,					
OTHERS	DIMENSION	220*68*38.8n		(=30)									
	PACKING		s/14.4Kg/0.740	CUFT									
		0. 1			out, rated load	and 25°C of a	ambient tempe	rature.					
NOTE	Ripple & noise are measure     Tolerance : includes set up     Derating may be needed ur     Type A only.	ed at 20MHz of tolerance, line nder low input	y mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.  d at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.  olerance, line regulation and load regulation.  der low input voltages. Please check the static characteristics for more details.										

- 6. Safety and EMC design refer to EN60598-1, CNS15233, GB7000.1, FCC part18.
- Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time.
- 8. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.
- 9. Refer to warranty statement.



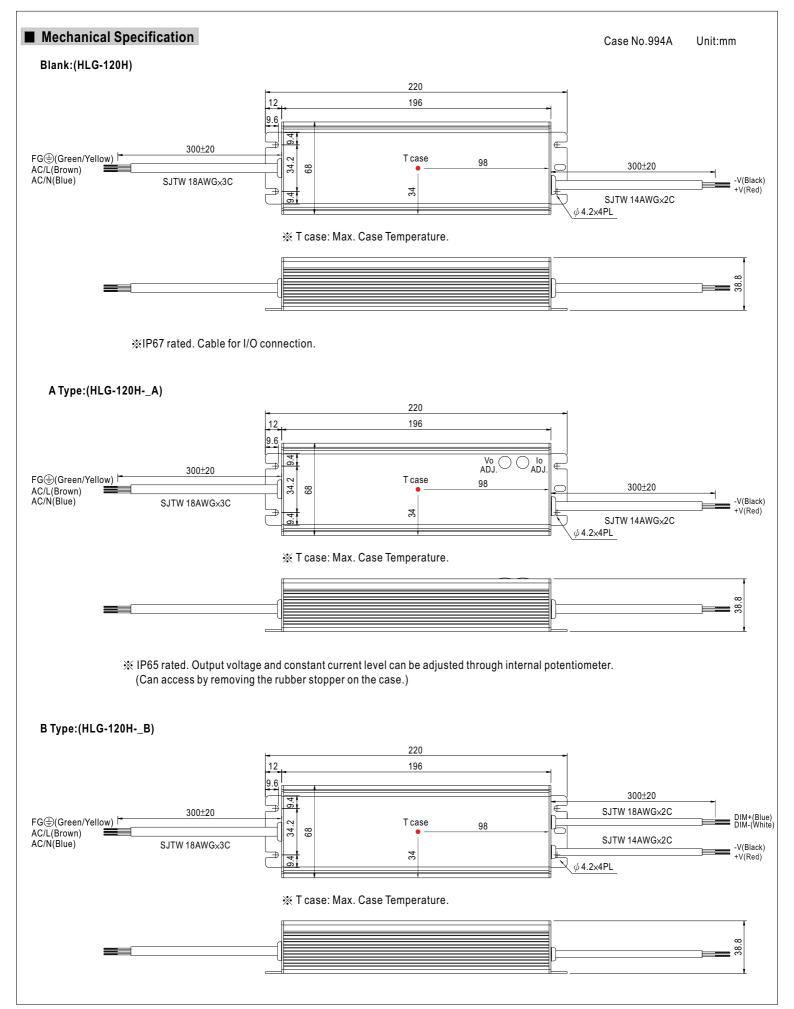





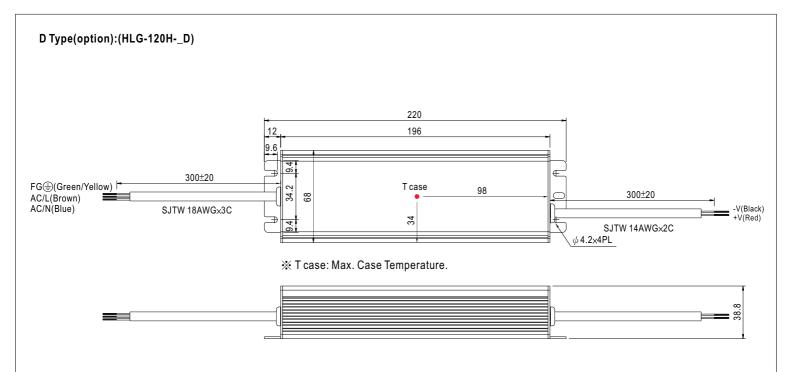

× IP67 rated. Timer dimming function, contact MEAN WELL for details.


# Fosc: 100KHz | Power & Circuit Switching Street St

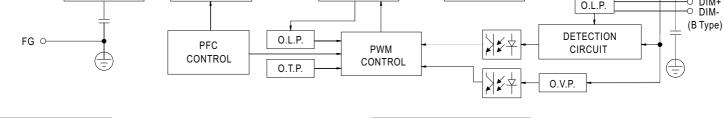

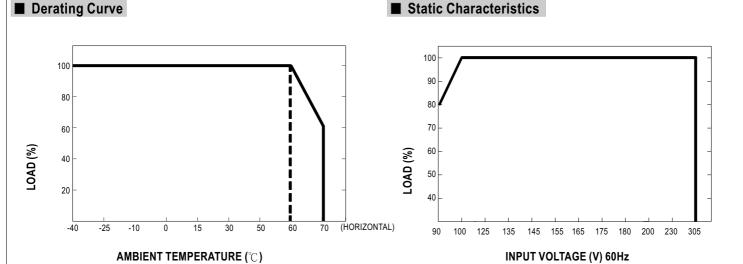




# **■** Power Factor Characteristic

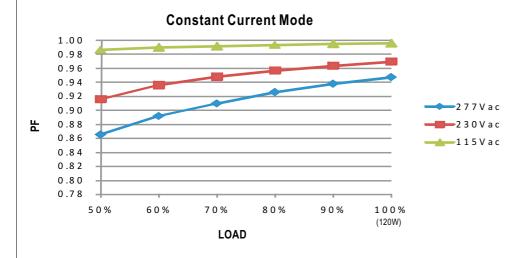

# **■** EFFICIENCY vs LOAD (48V Model)

HLG-120H series possess superior working efficiency that up to 93.5% can be reached in field applications.

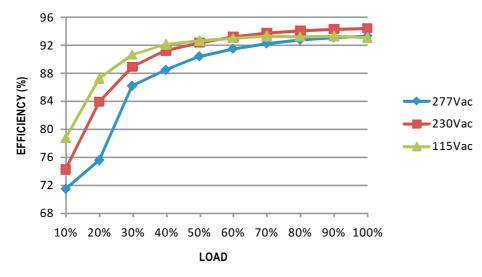


# ■ DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive method "direct drive" and "with LED driver".

A typical LED power supply may either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs.


Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode (with LED driver, at area (A) and CC mode (direct drive, at area (B).

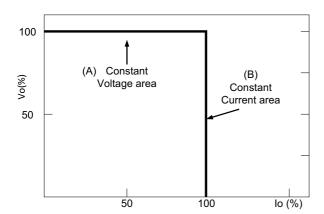

Typical LED power supply I-V curve



## **■** DIMMING OPERATION

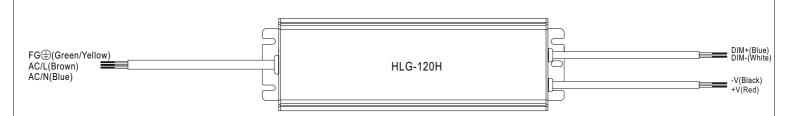

- ※ Please DO NOT connect "DIM-" to "-V".
- X Reference resistance value for output current adjustment (Typical)

Resistance value	<b>10K</b> Ω	<b>20K</b> Ω	<b>30K</b> Ω	<b>40K</b> Ω	<b>50K</b> Ω	<b>60K</b> Ω	<b>70K</b> Ω	<b>80K</b> Ω	90ΚΩ	<b>100K</b> Ω	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	102%~108%

#### 


Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	102%~108%

### ※ 10V PWM signal for output current adjustment (Typical): Frequency range :100HZ ~ 3KHz

Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	102%~108%

XUsing the built-in dimming function on B-type model can't turn the lighting fixture totally dark. Please refer to the connection method below to achieve 0% brightness of the lighting fixture connecting to the LED power supply unit.

Dimming connection diagram for turning the lighting fixture ON/OFF:

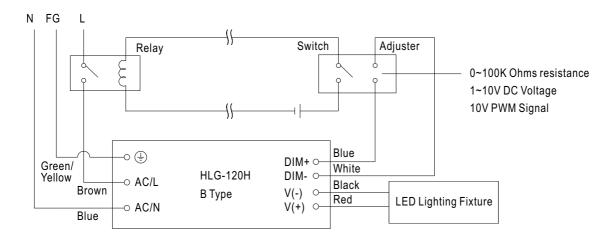

Using a switch and relay can turn ON/OFF the lighting fixture.


- 1.Output constant current level can be adjusted through output cable by connecting a resistance or 1~10Vdc or 10V PWM signal between DIM+ and DIM-.
- 2. The LED lighting fixture can be turned ON/OFF by the switch.



## **■** WATERPROOF CONNECTION


#### Waterproof connector

Waterproof connector can be assembled on the output cable of HLG-120H to operate in dry/wet/damp or outdoor environment.

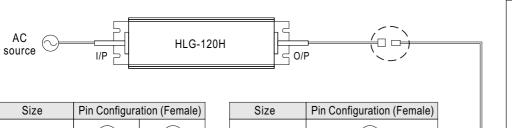

Size	Pin Configuration (Fema					
M12	00	000				
IVIIZ	4-PIN	5-PIN				
	5A/PIN	5A/PIN				
Order No.	M12-04	M12-05				
Suitable Current	10A max.	10A max.				

Size	Pin Configuration (Female)					
M4 <i>E</i>	$\odot$					
M15	2-PIN					
	12A/PIN					
Order No.	M15-02					
Suitable Current	12A max.					



#### O Cable Joiner

